

SF20RKS



°SF20RKS

SF20RKS (R-Round, K-locking cap, S-safety cap) provides a hook with a screw-down closure for more secure installations (especially in higher traffic areas) and a safety cap to prevent unintentional adjustment.

° Product Information

cable size

1/16" 1.5 mm
3/32" 2.5 mm

maximum weight

1/16": 65 lbs. 30 kg
3/32": 155 lbs. 70 kg




function

midway; hook

installation instructions

Loosen safety cap almost completely. Insert cable. Adjust to correct height; tighten safety cap. Loosen set screw with 2.5mm allen key on K closure and slide off closure. Attach to picture wire or D-rings. Coil excess cable around itself to hide behind picture. Slide closure back on and tighten set screw. Do not overtighten..

2-3

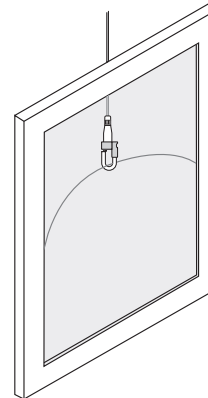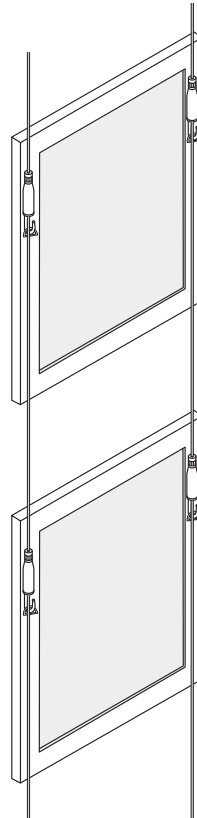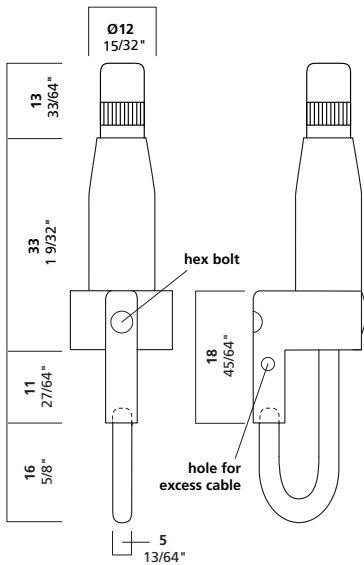

Arakawa Hanging Systems

2505 SE 11th Avenue, Suite 122
Portland, Oregon 97202
phone: 503.236.0440
fax: 503.236.0427
toll free: 888.272.5292

www.arakawagrip.com



Copyright © 2007 Arakawa & Co., Ltd. All rights reserved. Arakawa products are covered by U.S. and foreign patents, issued and pending. Specification and price change privileges reserved.