SF27SET

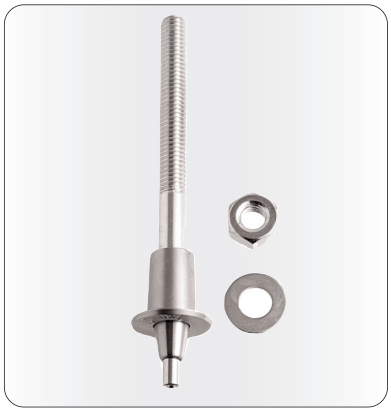

°SF27SET

SF27 is intended as a ceiling fastener, for use in suspended ceilings, attached either to the concrete structure or to Unistrut® or similar. Hollow structure allows excess cable to be inserted through part and into ceiling cavity (depending on structure).

° Product Information

cable size
1/16″ 1.5 mm
3/32″ 2.5 mm

2-3

maximum weight
1/16″: 65 lbs. 30 kg
3/32″: 155 lbs. 70 kg

function
ceiling: sheetrock, acoustic tile, Unistrut®

installation instructions
Separate SF27 into 3 parts: bolt, flange and gripper. Fix the bolt to reinforcement material, fasten the flange to the bolt, and then screw in the gripper. Distance from surface of ceiling panel to bolt is 9-10 mm.

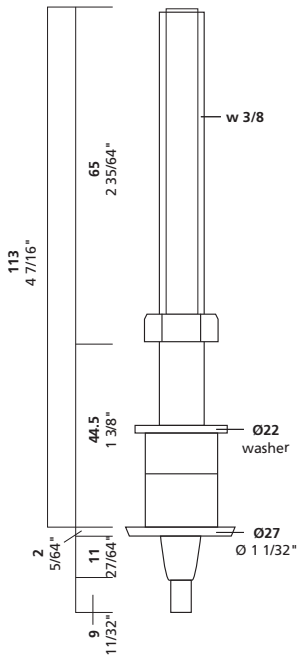

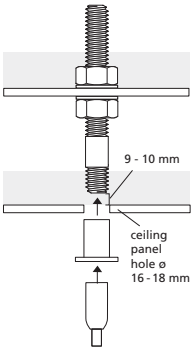

Arakawa Hanging Systems
2505 SE 11th Avenue, Suite 122
Portland, Oregon 97202
phone: 503.236.0440
fax: 503.236.0427
toll free: 888.272.5292

www.arakawagrip.com

Copyright © 2008 Arakawa & Co., Ltd. All rights reserved.
Arakawa products are covered by U.S. and foreign patents, issued and pending. Specification and price change privileges reserved.