


# SF38SSET



## °SF38SSET

SF38 incorporate the familiar bullet shaped body with a 3/8-16 male thread, permitting installations into concrete ceilings (using a 3/8-16 threaded nut, anchor or other feature). SF38S includes a Safety cap to prevent unintentional movement (SF38S).

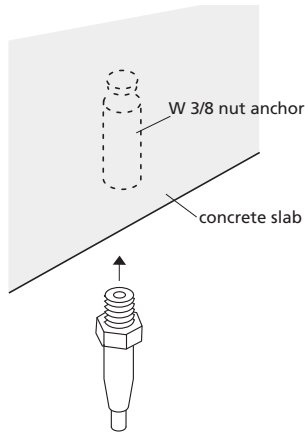

### ° Product Information

#### cable size

1/16" 1.5 mm

3/32" 2.5 mm

2-3

#### maximum weight

1/16": 65 lbs. 30 kg

3/32": 155 lbs. 70 kg

#### function

ceiling: 3/8-16 anchor

midway

#### installation instructions

Concrete: Drill hole for 3/8"-16 anchor, set firmly into concrete. Screw in SF38, unscrew safety cap almost completely, insert cable into tip of gripper, tighten safety cap.

#### Arakawa Hanging Systems

2505 SE 11th Avenue, Suite 122

Portland, Oregon 97202

phone: 503.236.0440

fax: 503.236.0427

toll free: 888.272.5292

[www.arakawagrip.com](http://www.arakawagrip.com)

Copyright © 2008 Arakawa & Co., Ltd. All rights reserved. Arakawa products are covered by U.S. and foreign patents, issued and pending. Specification and price change privileges reserved.

