



SF23CSET

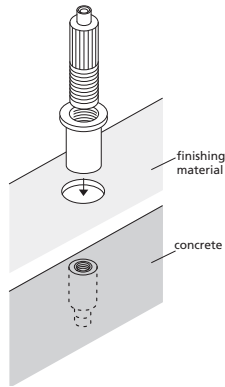

°SF23CSET

SF23 is a floor tensioner that also works well as a turnbuckle for balustrades. Use it to tension cables to minimize the movement of displays.

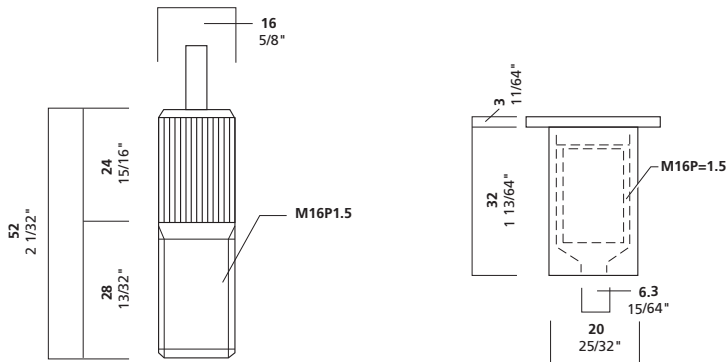

° Product Information

cable size

1/16" 1.5 mm

3/32" 2.5 mm

maximum weight

1/16": 65 lbs. 30 kg

3/32": 155 lbs. 70 kg

function

tensioner: floor

SF23CSET: countersunk: concrete, tile

23P: dust cover for SF23CSET

installation instructions

Drill 3/4 inch hole in concrete 1 3/8 inch deep. Drill hole for 1/4-20 concrete anchor at bottom of first hole. Insert anchor into hole, using epoxy if necessary. Bolt the C socket to the anchor with 1/4-20 bolt/screw. Adjust cable in ceiling connector so cable is 1/2 inch below the floor level. Thread tensioner into socket two turns. Insert cable into tensioner. Turn tensioner down by HAND to tension.

2-3

° Companion Products, please see their individual information sheets.



°SF23ASET



°SF23BSET



°SF23DSET

Arakawa Hanging Systems

2505 SE 11th Avenue, Suite 122

Portland, Oregon 97202

phone: 503.236.0440

fax: 503.236.0427

toll free: 888.272.5292

www.arakawagrip.com



Copyright © 2007 Arakawa & Co., Ltd. All rights reserved. Arakawa products are covered by U.S. and foreign patents, issued and pending. Specification and price change privileges reserved.